

FIG. 1 is a perspective view of a conveyor system 10 in accordance with the present invention. The conveyor system 10 includes a frame 12, a drive roller 36, a driven roller 32, a motor 38, a belt 40, and a plurality of rollers 30. The rollers 30 are supported by a frame 14 and are arranged in a line. The motor 38 is connected to the drive roller 36 and the driven roller 32. The belt 40 is driven by the motor 38 and the drive roller 36. The rollers 30 are used to transport material along the conveyor system 10.


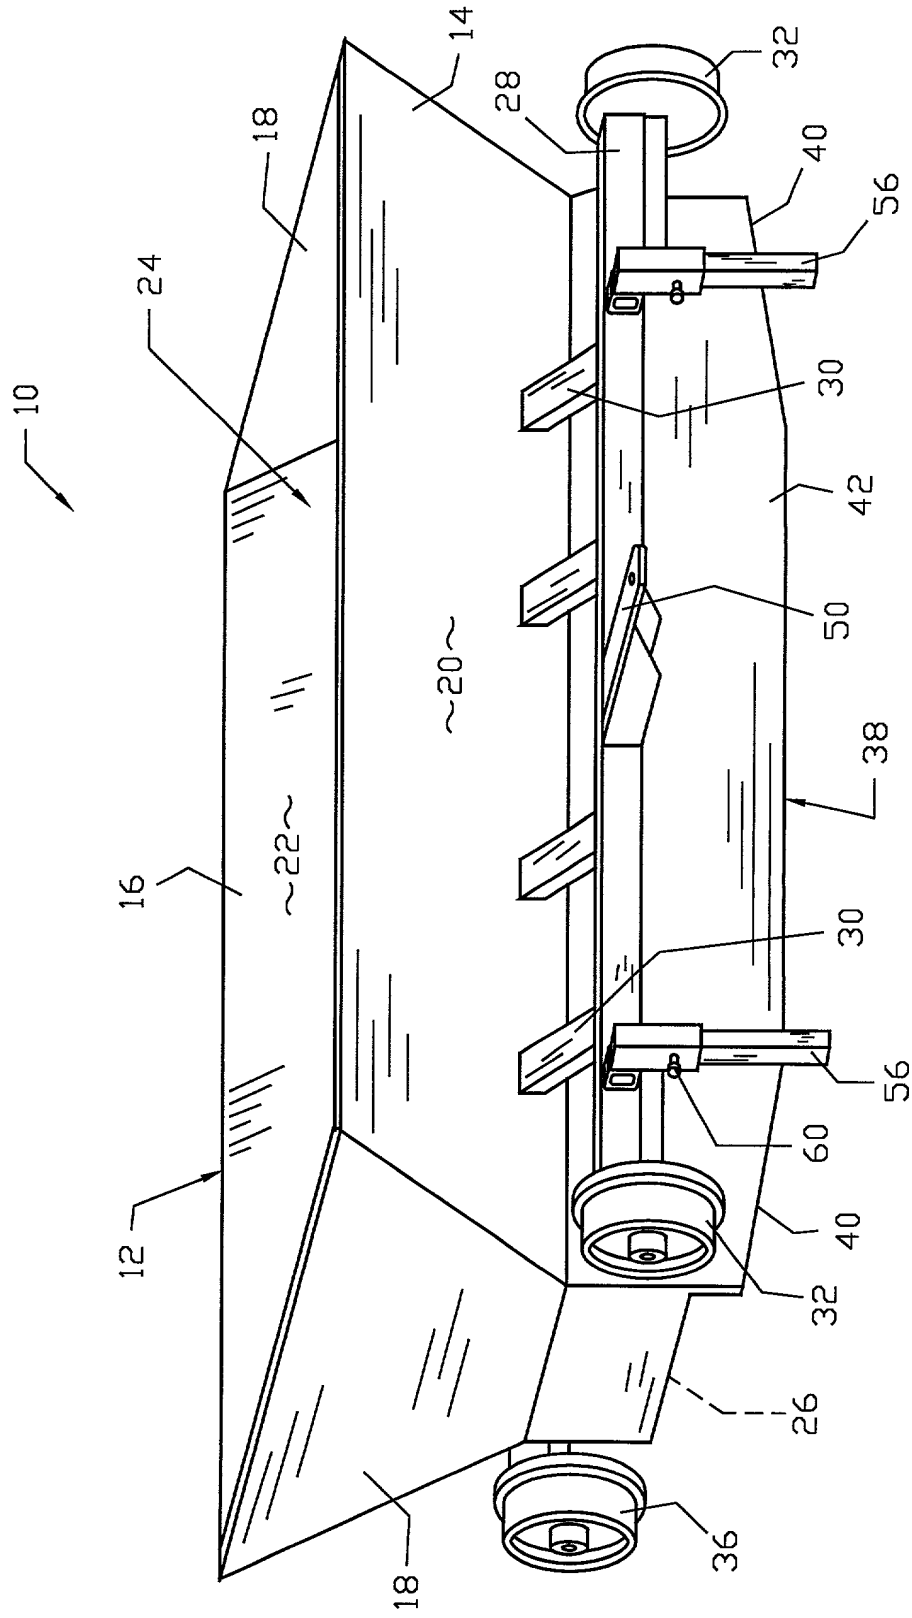


Fig. 1

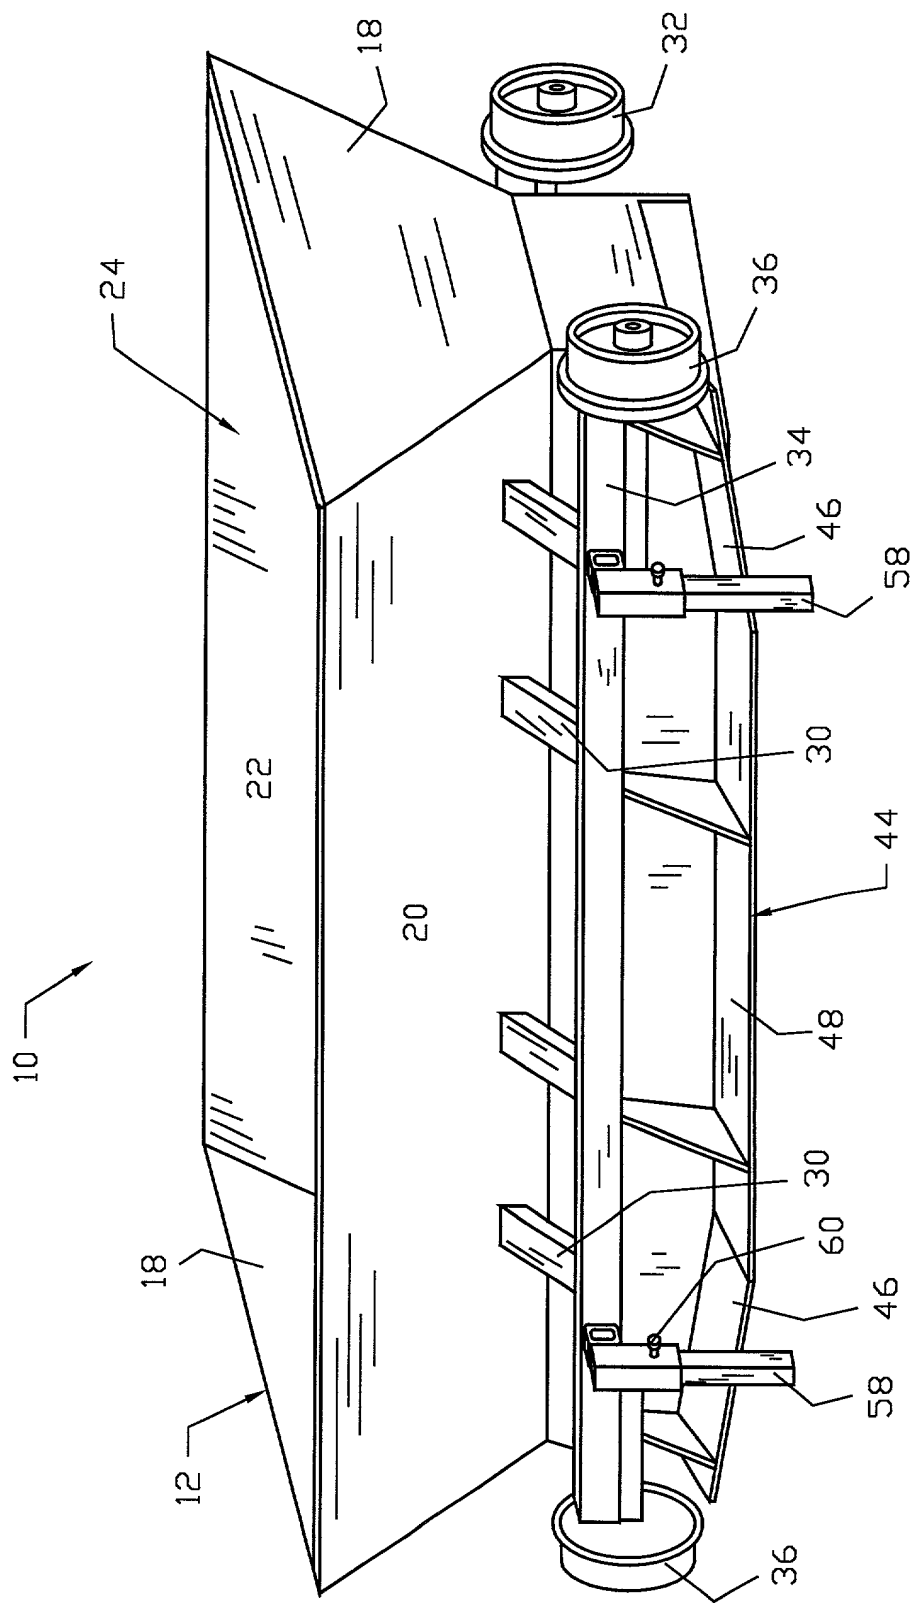

2
Eig

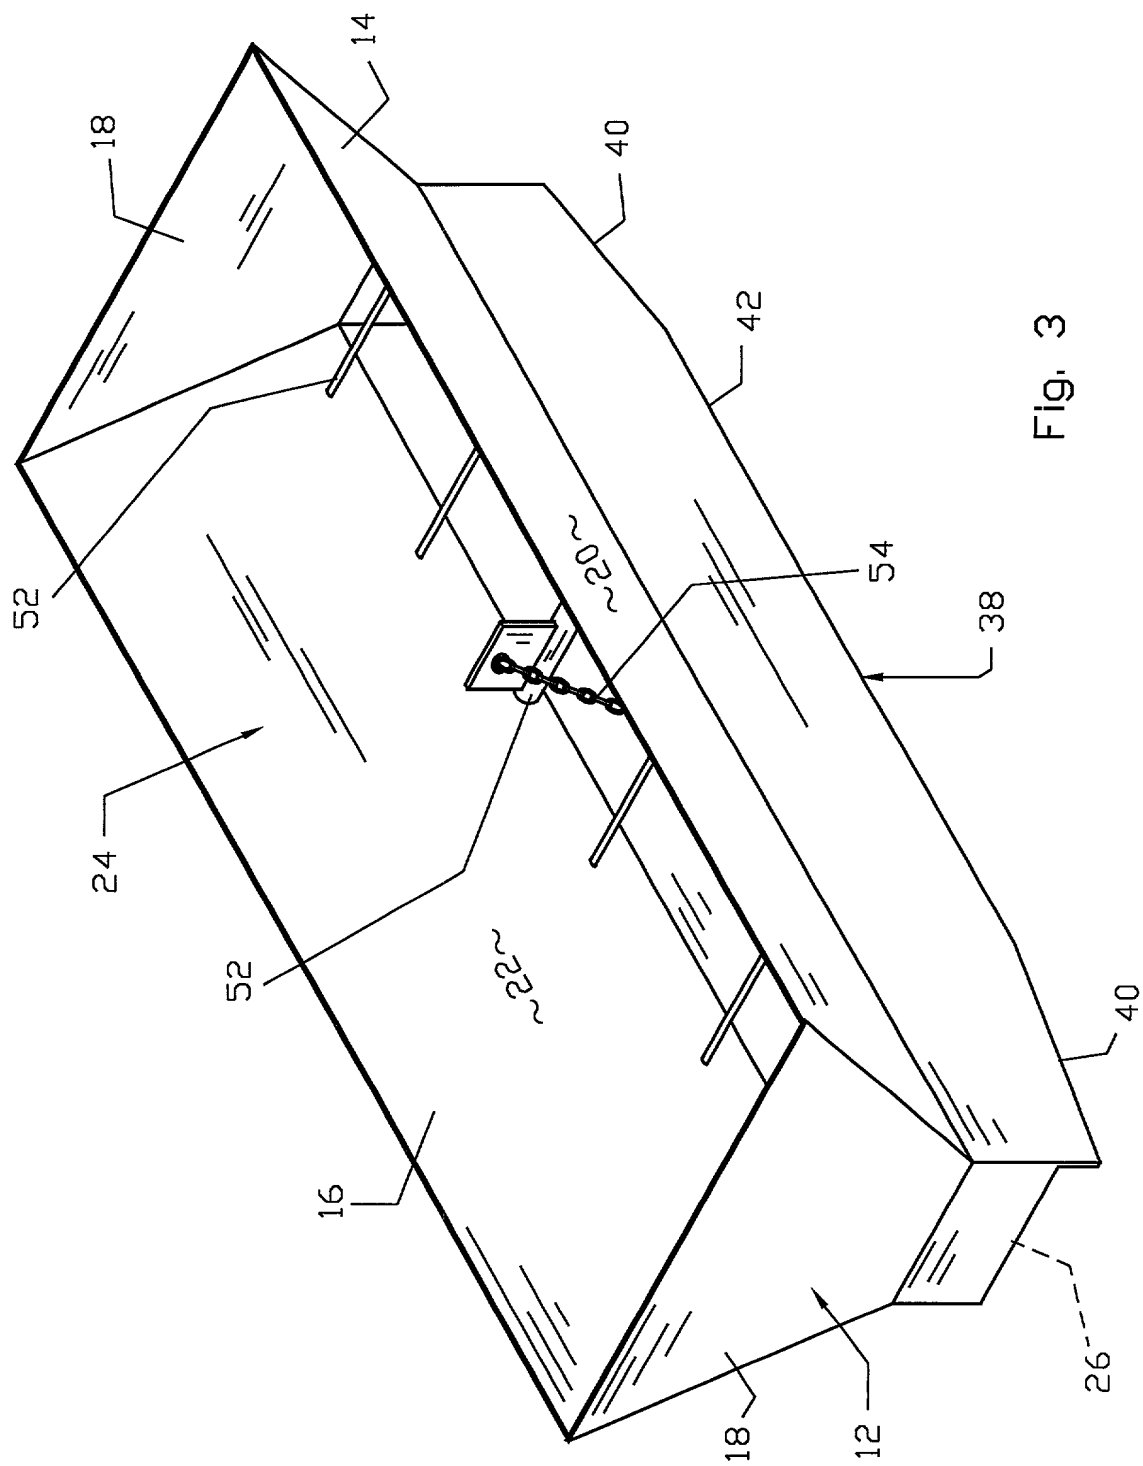


Fig-3

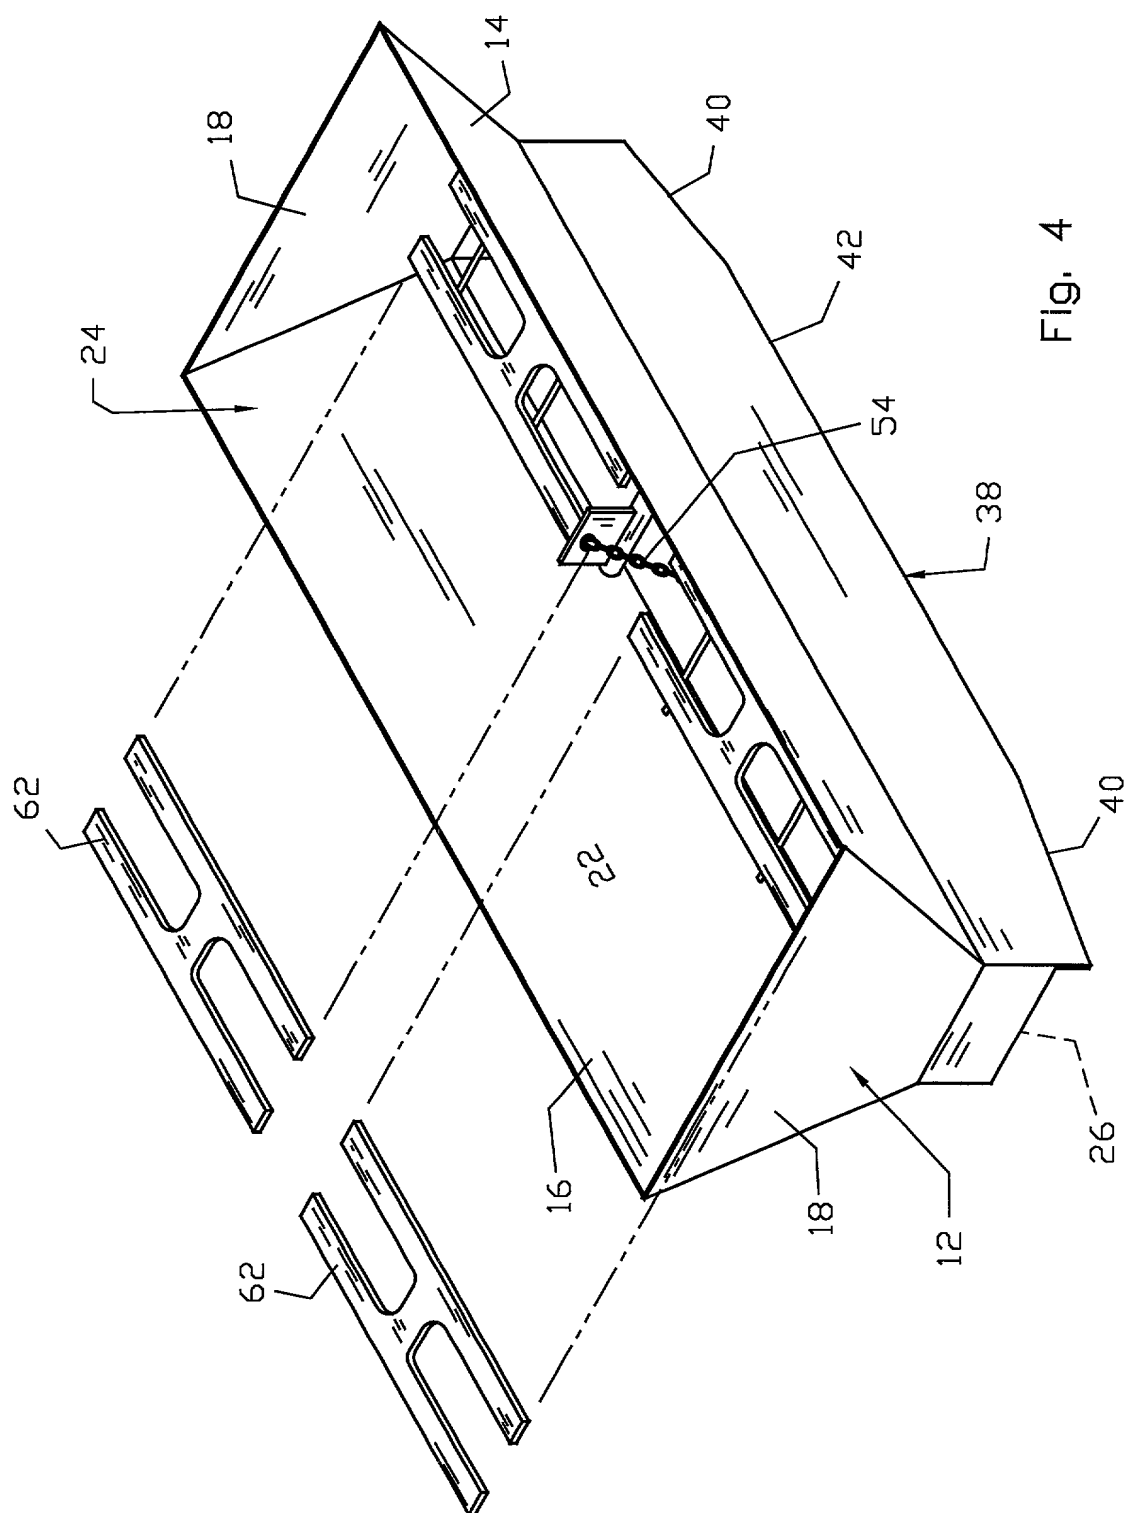


Fig. 4